



ALTERRA PRO LARGE HYBRID WOOD INSERT

NEW
i3000
Model

regency-fire.com

Introducing Our Newest Wood Insert:

Welcome to the world of warmth, elegance, and unparalleled craftsmanship. Designed to transform your fireplace into a captivating focal point, the i3000 blends timeless beauty with modern functionality, offering the perfect balance of form and function.



Unmatched Versatility: Whether you prefer a classic aesthetic or a sleek, contemporary look, our wood insert is designed to complement any style of décor. With a variety of finishes and designs to choose from, you can easily customize your insert to suit your personal taste.

CHOOSE YOUR LOOK



SURROUND
(PREMIUM OR TRADITIONAL)

FACEPLATE
(CONTEMPORARY, CLASSIC OR ARCHED)

DOOR STYLE
(CONTEMPORARY OR CLASSIC)

The surround slips over the faceplate.

PREMIUM FEATURES



*Edge to Edge
Frameless Glass Door*



*Smooth
Contemporary Refractory
Panels (included)*



*Door is Flush
With Faceplate*

FRONT OPTIONS



Contemporary Faceplate



*Oversize Contemporary
Faceplate*



Classic Faceplate



Oversize Classic Faceplate



Arched Faceplate


PREMIUM SURROUNDS*




Black



White



Sunset Bronze



Grey




Brushed Nickel

TRADITIONAL SURROUNDS*



Black



Brushed Antique Copper

CUSTOM FACEPLATE



Custom 3-sided Faceplate

**NOTE: Surrounds will reduce your minimum fireplace opening size. Refer to manual for more information. Premium or Traditional Surrounds can only be used with Contemporary or Classic Faceplates*



i3000R shown with Oversize Contemporary Faceplate



i3000R - shown with Contemporary Faceplate and Brushed Nickel Premium Surround



i3000A - shown with Classic Faceplate and Brushed Antique Copper Traditional Surround



i3000A - shown with Arched Faceplate

i3000 WOOD INSERT

FEATURES

- Removable flue collar, wheels and leveling bolts assist with quicker installation
- Adjustable door latch ensures a tight door seal over time
- Front mounted air adjustment & catalytic bypass
- Digital catalytic temperature monitor helps your stove reach maximum burn times & efficiency
- High performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge log retainer, which will develop a beautiful patina with use, keeps logs in their place
- Triple-burn technology creates longer and more complete burns
- Backed by the industry's most comprehensive Limited Lifetime Warranty
- 10-year, 100% coverage on original metal catalyst
- Qualifies for U.S. Biomass Tax Credit

OPTIONS

- Concealed temperature sensitive variable speed blower
- Regular, oversize or custom faceplate options
- Premium or Traditional surrounds
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits




SPECIFICATIONS	
Maximum BTU*	85,000
Typical sq. ft. heated**	up to 2,600
EPA Efficiency	84% LHV / 78% HHV
Max Log Size	20"

MIN. FIREPLACE OPENING			
	With Faceplate	With Faceplate + Premium Surround	With Faceplate + Traditional Surround
Width (Front)	32"	32"	30.5"
Height	24"	24"	24"
Depth	21"	19.5"	19"

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.
 * Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.
 ** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

SPECIFICATIONS

DIMENSIONS

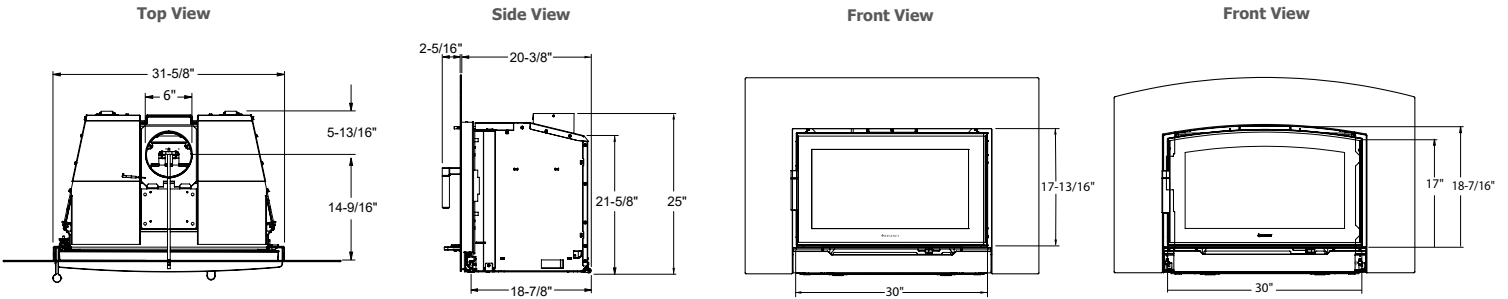


DIMENSIONS	i3000R	i3000A
Contemporary Faceplate (W x H)	45-3/4" x 31"	--
Oversize Contemporary Faceplate (W x H)	50-1/4" x 33-1/4"	--
Classic Faceplate (W x H)	--	46-1/8" x 31"
Oversize Classic Faceplate (W x H)	--	50-1/4" x 33-1/4"
Arched Faceplate (W x H)*	--	46-1/8" x 31"
Premium Surrounds (W x H)**	31-1/8"H x 46-3/4"W	31-1/8"H x 46-3/4"W
Traditional Surrounds (W x H)**	51-3/4" x 33-7/8"	51-3/4" x 33-7/8"

*Note: Height to top of arch. Height to side of arch is 28"

**Note: Premium or Traditional Surrounds can only be used with ontemporary or Classic Faceplates

MASONRY FIREPLACE CLEARANCES

Note: Shown with rectangular door. Arch door clearances are exactly the same.

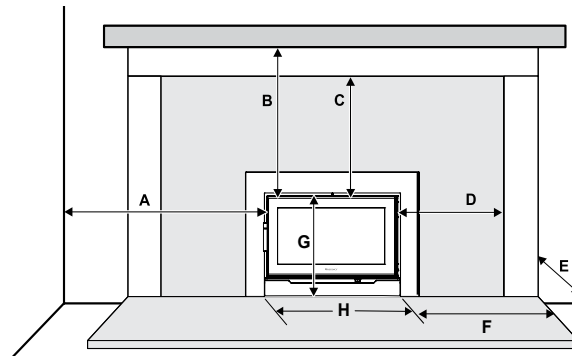

MASONRY FIREPLACE CLEARANCES

The minimum required clearances to combustible materials when installed into a masonry fireplace are listed below for 3" mantel:

UNITS	ADJACENT SIDE WALL TO SIDE OF DOOR	MANTEL** (TO TOP OF UNIT)	TOP FACING (TO TOP OF UNIT)	SIDE FACING* (TO SIDE OF DOOR)	MIN. HEARTH EXTENSION		MINIMUM HEARTH SIDE EXTENSION	TO TOP OF UNIT (REFERENCE DIMENSION ONLY)	FROM SIDE OF DOOR (REFERENCE DIMENSION ONLY)
	A	B	C	D	E (USA)	E (CANADA)	F	G	H
i3000	15-1/2" (394 mm)	15" (381 mm)	13-3/4" (349 mm)	11-3/4" (298 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	23-1/2" (597 mm) To top	30" (762 mm)

* Measured from side of door

** NOTE: Refer to manual for any mantel greater than 3" up to a maximum of 12"